


Dial D1

Rotary dimmer, 1-gang · \$89

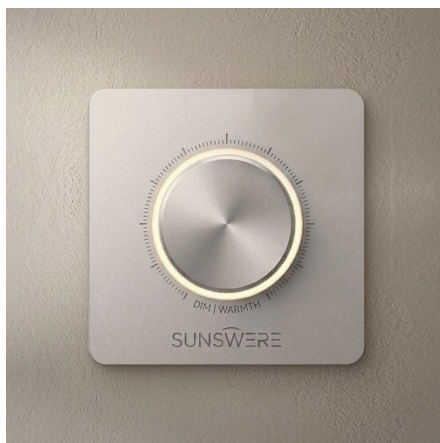

SPECIFICATIONS

Circuits	1
Max load	400 W trailing edge
Dimming	256 steps, trailing edge, tunable white
Energy metering	Yes, +/-2% above 5 W
Neutral required	No
Standby draw	< 0.5 W
Actuation	Machined aluminium knob, detented centre, push to toggle
Weight	156 g
Housing	UL 94 V-0 polycarbonate, tempered glass front
Supply	100 to 240 V AC, 50/60 Hz
Radio	802.15.4 Thread, Bluetooth LE for commissioning
Protocol	Matter 1.3
Module depth	39 mm
Faceplate	88 x 88 mm (EU/UK/AU) or 70 x 115 mm (US)
Operating temp	-5 to 40 C

IN THE BOX

Dimmer module, faceplate, knob (pre-fitted), LED bypass capacitor, mounting screws, quick-start card

COMPLIANCE

Standards	UL 20 (US/CA), EN 60669 (EU/UK), AS/NZS 3112 (AU/NZ)
Certification	Matter 1.3 certified, Thread Group member
Declaration of Conformity	SW-DoC-D1-2026
Warranty	2 years, extendable to 5

Issued 2026. Figures are typical at 230 V unless stated. Installation must comply with local wiring regulations and, in most regions, be carried out by a qualified electrician.