




Socket R1

Metered outlet, 16 A · \$69

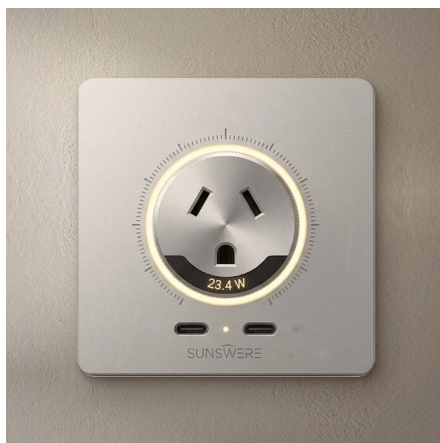

SPECIFICATIONS

Circuits	1 outlet plus 2 USB-C
Max load	16 A / 3680 W
USB-C output	30 W per port, 60 W total
Energy metering	Yes, +/-2% above 5 W
Neutral required	Yes
Socket patterns	NEMA 5-15, BS 1363, Schuko CEE 7/3, AS/NZS 3112
Weight	172 g
Housing	UL 94 V-0 polycarbonate
Supply	100 to 240 V AC, 50/60 Hz
Radio	802.15.4 Thread, Bluetooth LE for commissioning
Protocol	Matter 1.3
Module depth	39 mm
Faceplate	88 x 88 mm (EU/UK/AU) or 70 x 115 mm (US)
Operating temp	-5 to 40 C

IN THE BOX

Outlet module, faceplate, mounting screws, quick-start card

COMPLIANCE

Standards	UL 20 (US/CA), EN 60669 (EU/UK), AS/NZS 3112 (AU/NZ)
Certification	Matter 1.3 certified, Thread Group member
Declaration of Conformity	SW-DoC-R1-2026
Warranty	2 years, extendable to 5

Issued 2026. Figures are typical at 230 V unless stated. Installation must comply with local wiring regulations and, in most regions, be carried out by a qualified electrician.